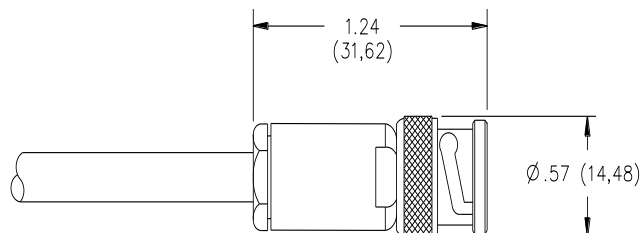


Model 5056 & Assembly Instructions
Triaxial Male 2 Lug Connector to Cable

Model 5056
Triaxial Male 2 Lug Connector to Cable

Features

- Fits Belden 9222 triaxial cable, 0.242" O.D.

Materials

Body and Fittings:	Brass, Tarnish Resistant Plating
Center Contacts:	Male: Brass, Gold Plated
Outer Contact:	Beryllium Copper, Gold Plated
Dielectric:	PTFE

Specifications

Voltage:	500 Vrms
Impedance:	50 Ohm
Temperature:	-65° C. (-85° F.) to +165° C. (+329° F.)
Frequency Range:	DC to 500 MHz

Ordering Information

Model: 5056
Triaxial Male 2 Lug Connector for Belden 9222 Cable

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm),
.xxx = ±.005" (.127 mm). All specifications are to the latest revisions.
Specifications are subject to change without notice. Registered trademarks are
the property of their respective companies.

Model 5056 & Assembly Instructions Triaxial Male 2 Lug Connector to Cable


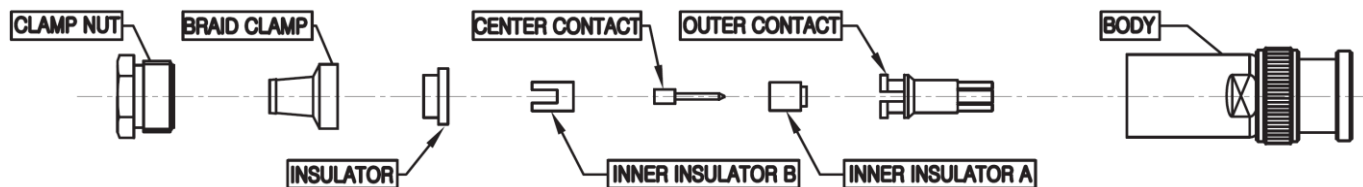


FIGURE #1

- 1.1 Strip cable per drawing lengths (mm).
- 1.2 Slide nut onto stripped cable.
- 1.3 Insert braid clamp and insulation on stripped cable.



FIGURE #2

- 2.1 Solder pin with center conductor then insert inner insulator A and B on the pin.
- 2.2 Peel back shield and insert outer contact.

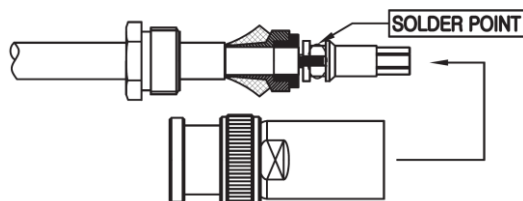


FIGURE #3

- 3.1 Position shield on solder point and solder outer contact to shield.
- 3.2 Insert body on assembled cable and fasten with wrench.




FIGURE #4

- 4.1 Completed assembly shown.

USA: Sales: 800-490-2361
 Technical Support: technicalsupport@pomonatest.com
 Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm),
 .xxx = ±.005" (.127 mm). All specifications are to the latest revisions.
 Specifications are subject to change without notice. Registered trademarks are
 the property of their respective companies.