

PINTEK AC/DC Current Probe

★ DC~1MHz /
2mA~70ADC, 140Ap-p



PA-677

- Max. ± 70 ADC/140Ap-p
- Sensitivity: ≥ 2 mA
- Bandwidth: DC~1MHz
- Rise Time: 0.35 μ S
- Over Range Function
- 50mV/A, 500mV/A Range
- Adaptor/Battery Input
- Separating Design, Convenient Durable



敏盛企業有限公司

MAVIN METROLOGY EN.CO.,LTD


TEL:03-5970828 FAX:03-5972622

地址：新竹縣湖口鄉工業四路3號2F

<http://www.mavin.com.tw>





PA-677 AC/DC Current Probe

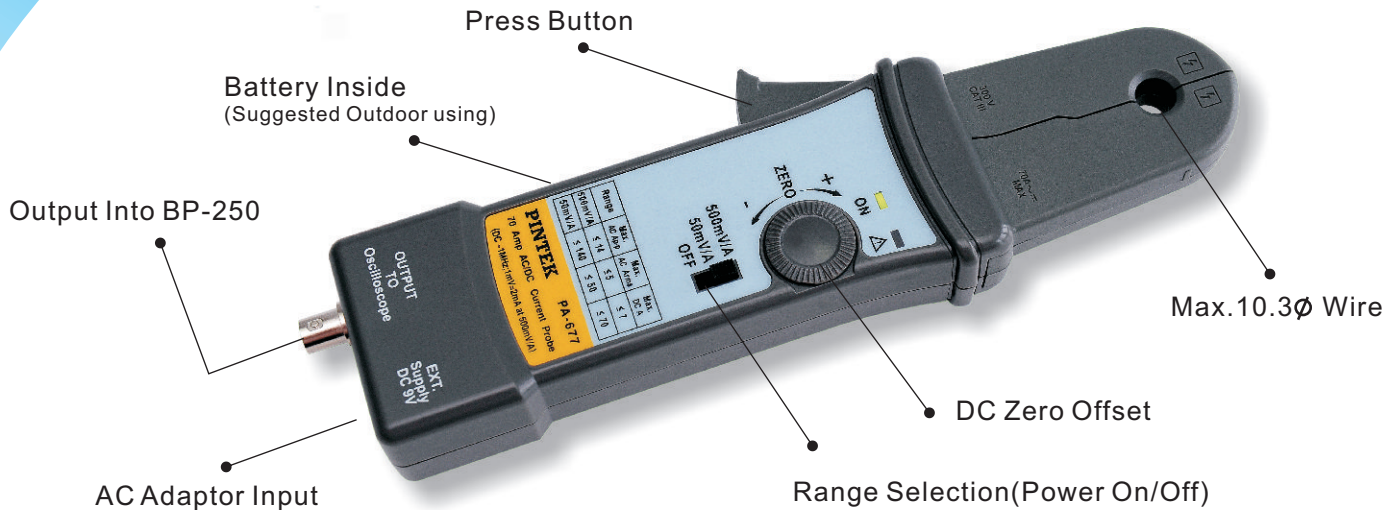

SPECIFICATIONS:

FUNCTION/MODEL	PA-677
DC Accuracy Typical	±3%: 20mA~14A peak at 500mV/A ±4%: 200mA~100A peak at 50mV/A ±15%: 100A~140A peak
Max. Working Voltage	300V CAT III
Max. Sensitivity	≥ 2 mA
Frequency Range	DC-1MHz(-3dB)
Rise Time	0.35 μS
Battery or Adaptor	9V NEDA 1604A, IEC DLR61 or PINTEK Specified Adaptor
Accessories	BP-250, MT-246N, Adaptor, Instruction Manual.

Waveform Comparison Between PA-677 And Other Brand In Market:

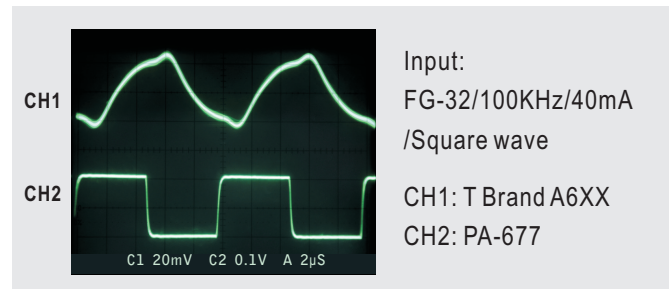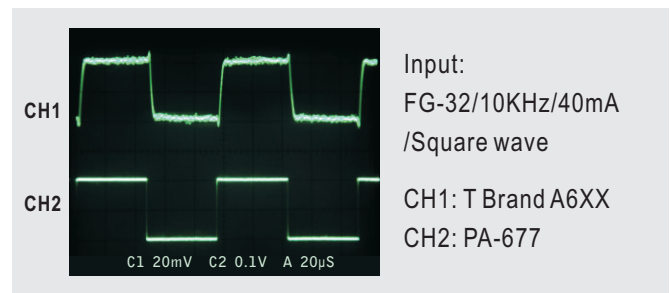

ACCESSORIES:

