


**Models 72926**  
**IEC Insulated BNC Male 50 ohm Cable**

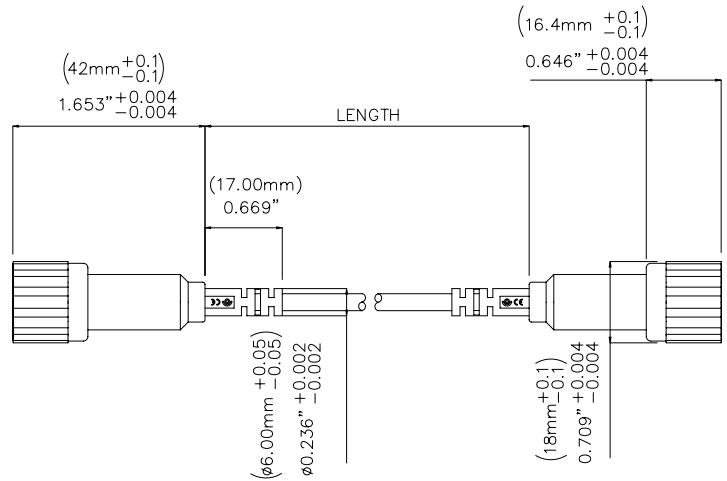

**Features**

- IEC Insulated BNC Male to BNC Male 50 ohm cable.

**Materials**

- Connector body: Nickel plated Brass
- Center Contact: Gold Plated Brass
- Dielectric: White PTFE

**Ordering Information**

Model: 72926-C-Length  
Available Lengths: 40 inches (-40) or 80 inches (-80)

**Specifications**

Max Current	3 A Max
Max Voltage	500 V CAT I 150 V CAT III
Cable	50 $\Omega$

**USA:** Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500  
e-mail: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)

**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm .02''$  (.51 mm), .xxx =  $\pm .005''$  (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Copyright © 2004 2/2006 72926 Rev A Page 1 of 1



敏盛企業有限公司  
<http://www.mavin.com.tw>

免責聲明  
資料僅供參考，若有與原廠不合之處，請以原廠規格為準，且不提供任何證明文件之用  
TEL:03-5970828 FAX:03-5972622 新竹湖口工業區工業四路3號2F