


Model 4290
Adapter, SMA Male to BNC Female



Materials

Body: Beryllium Copper
 Contacts: Male – Brass
 Female – Beryllium Copper
 Finish: SMA Body – Gold Plated per MIL-G-45204, Type II, Class 2
 BNC Body – Nickel Plated per QQ-N-290
 Contacts – Gold Plated per MIL-G-45204, Type II, Class 2
 Dielectric: PTFE per L-P-403

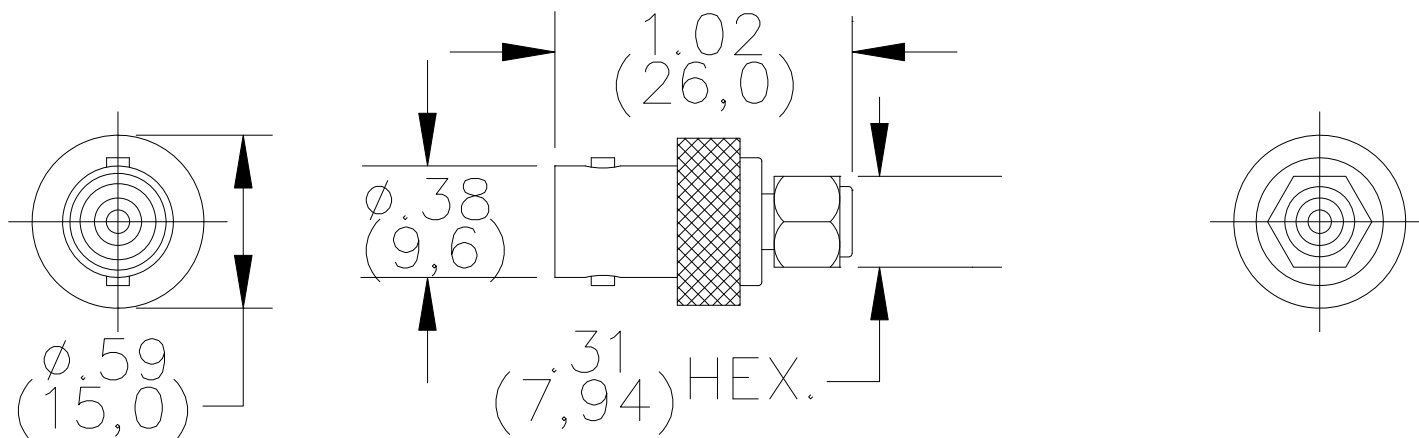

Specifications

Voltage: For CE Compliance and for personal safety, do not hold in hand when voltages exceed 33 Vrms/70 Vdc.
 Maximum voltage for hands free use: 335 Vrms Max.
 Operating Temperature: -65°C (-85°F) to +165°C (+329°F)
 Nominal Impedance: 50 Ohms
 Frequency Range: 0 – 12.4 GHz.

Ordering Information

Model: 4290

USA: Sales: 800-490-2361
 Technical Support: technicalsupport@pomonatest.com
 Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm),
 .xxx = ±.005" (.127 mm). All specifications are to the latest revisions.
 Specifications are subject to change without notice. Registered trademarks are
 the property of their respective companies.