


Model 4297
SMA (F) to Type N (M) Adapter

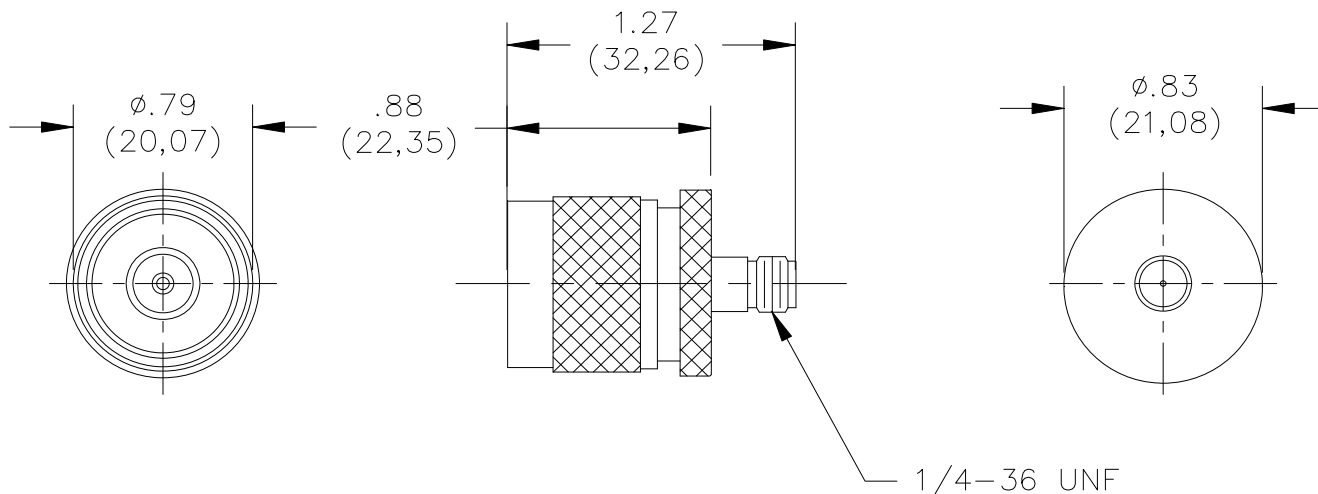

Materials

Body: Gold Plated Beryllium Copper
 Male Contact – Gold Plated Brass
 Female Contact – Gold Plated Beryllium Copper
 Dielectric: PTFE per L-P-403
 Finish: Body and Contacts – Gold Plated per MIL-G-45204, Type II, Class 2
 Marking: "Pomona 4297"

Ratings

Operating Voltage:
 Shield/Earth: 30VAC/60VDC Max.
 Inner Conductor/Shield: 335VRMS Max.
 Operating Temperature:
 -65°C to +165°C (-85°F to +329°F)
 Nominal Impedance: 50 Ohms
 Frequency Range: 0 – 12.4 GHz

Ordering Information

Model: 4297

USA: Sales: 800-490-2361
 Technical Support: technicalsupport@pomonatest.com
 Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.